


Capacity / WHP / VHP / NIPR

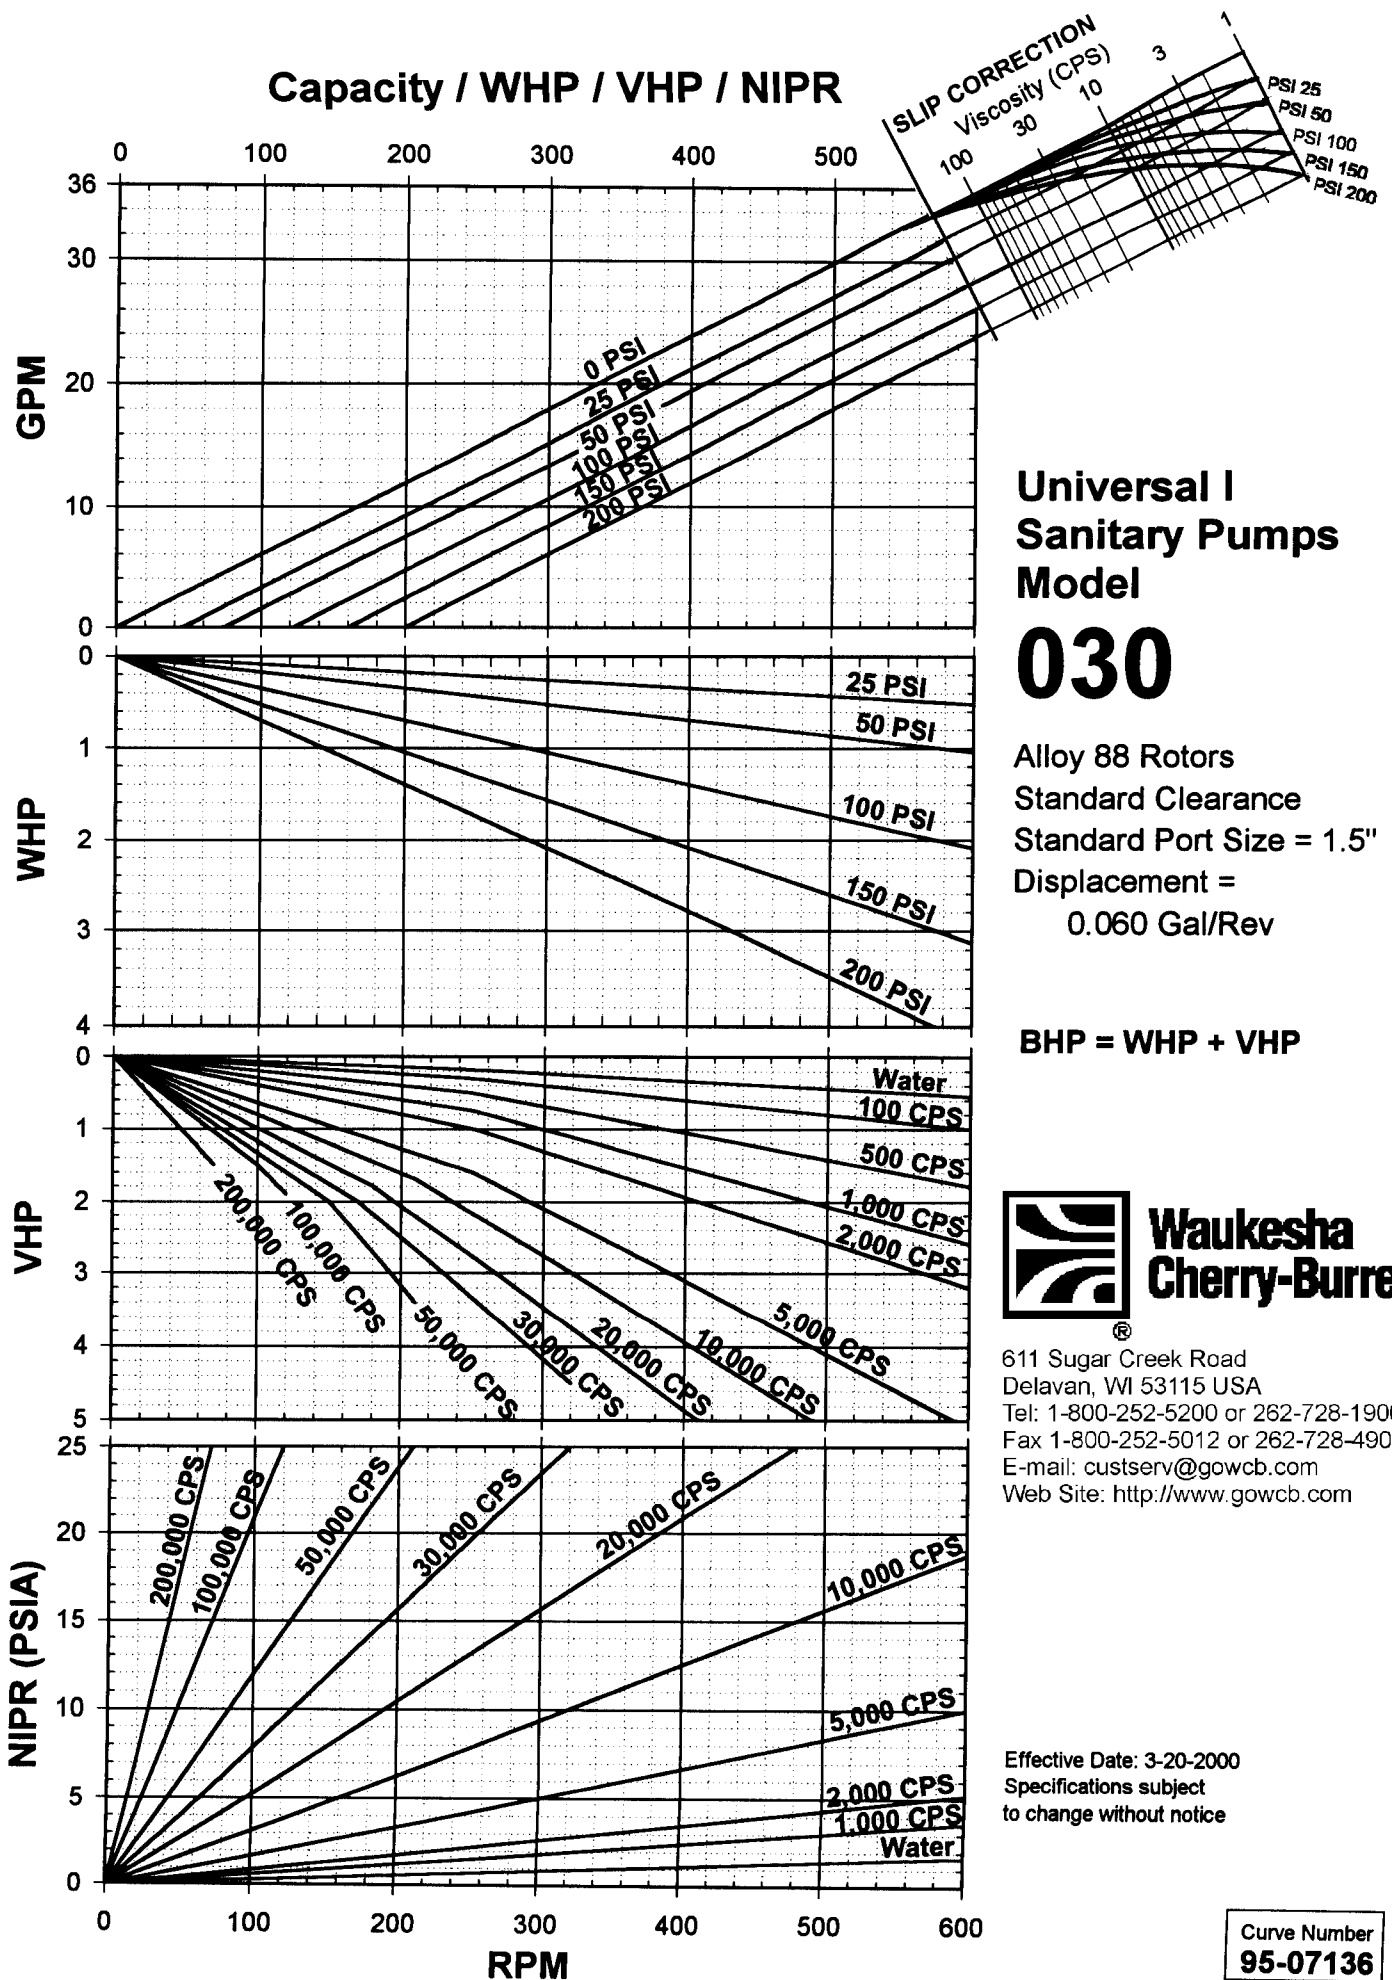

Universal I Sanitary Pumps Model

030

Alloy 88 Rotors
Standard Clearance
Standard Port Size = 1.5"
Displacement =
0.060 Gal/Rev


BHP = WHP + VHP



611 Sugar Creek Road
Delavan, WI 53115 USA
Tel: 1-800-252-5200 or 262-728-1900
Fax 1-800-252-5012 or 262-728-4904
E-mail: custserv@gowcb.com
Web Site: <http://www.gowcb.com>

Effective Date: 3-20-2000
Specifications subject
to change without notice

Curve Number
95-07136

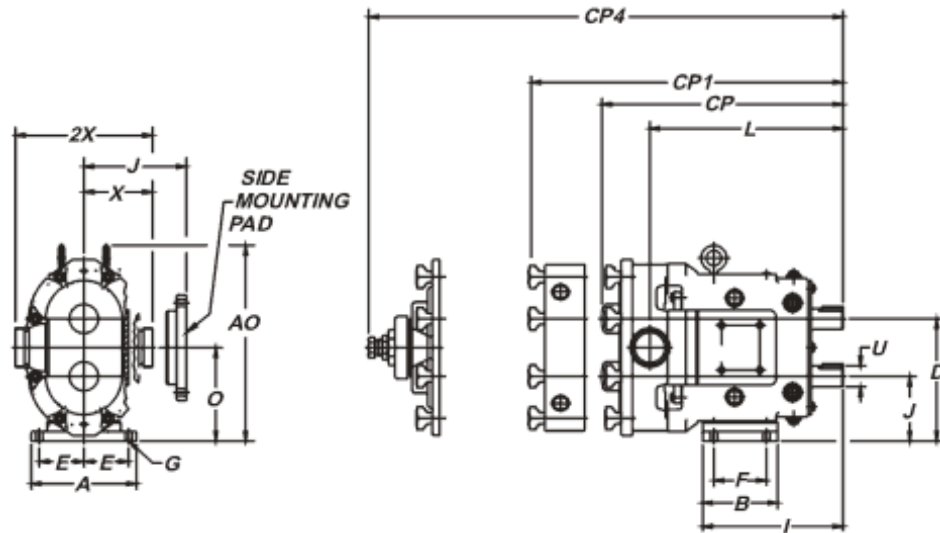

	A	AO	B	CP	CP1	CP4	D	E	F	G	I	J	L	O	U	X	2X
IN	6.25	10.29	4.25	14.58	16.42	17.67	6.86	2.31	2.56	.41,SLOT	8.83	3.56	11.61	5.21	1.250	4.25	8.50
MM	159	261	108	370	417	449	174	59	65	10,SLOT	224	90	295	132	32	108	216